



BOOMER LINE





Suspension — Design by Jos Muller



PRODUCT INFORMATION






tossB






BOOMER LINE




Suspension — Design by Jos Muller

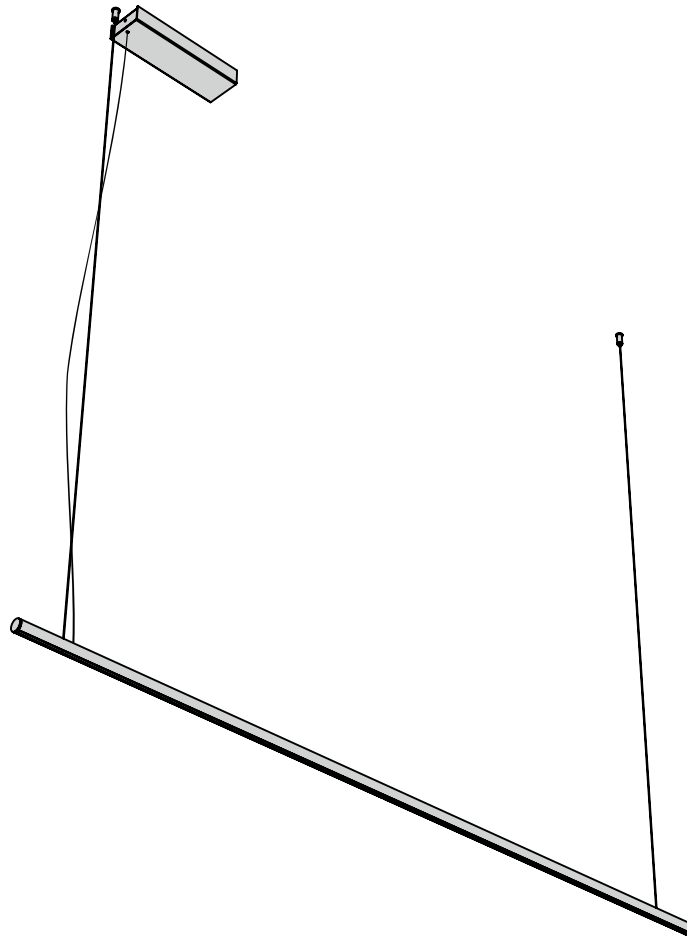
	BOOMER LINE 1200 DOWN	FINISH & ORDER CODE 2700K Black T86H15DZL 2700K White T86H15DWL 2700K Brushed alu T86H15DAB 3000K Black T86H24DZL 3000K White T86H24DWL 3000K Brushed alu T86H24DAB	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K/ 3000K Fitting: - Max. watt: 24W Voltage: 24V Lumen 2700K: 2574 Lumen 3000K: 2691 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request		 IP20
	BOOMER LINE 1200 UP	FINISH & ORDER CODE 2700K Black T86H22DZL 2700K White T86H22DWL 2700K Brushed alu T86H22DAB 3000K Black T86H31DZL 3000K White T86H31DWL 3000K Brushed alu T86H31DAB	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K/ 3000K Fitting: - Max. watt: 24W Voltage: 24V Lumen 2700K: 2574 Lumen 3000K: 2691 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request		 IP20
	BOOMER LINE 1800 DOWN	FINISH & ORDER CODE 2700K Black T86H14DZL 2700K White T86H14DWL 2700K Brushed alu T86H14DAB 3000K Black T86H25DZL 3000K White T86H25DWL 3000K Brushed alu T86H25DAB	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K/ 3000K Fitting: - Max. watt: 36W Voltage: 24V Lumen 2700K: 3905 Lumen 3000K: 4082 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request		 IP20
	BOOMER LINE 1800 UP	FINISH & ORDER CODE 2700K Black T86H23DZL 2700K White T86H23DWL 2700K Brushed alu T86H23DAB 3000K Black T86H32DZL 3000K White T86H32DWL 3000K Brushed alu T86H32DAB	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K/ 3000K Fitting: - Max. watt: 36W Voltage: 24V Lumen 2700K: 3905 Lumen 3000K: 4082 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request		 IP20

	BOOMER LINE 2400 DOWN	FINISH & ORDER CODE 2700K Black T86H28DZL 2700K White T86H28DWL 2700K Brushed alu T86H28DAB 3000K Black T86H27DZL 3000K White T86H27DWL 3000K Brushed alu T86H27DAB	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K/ 3000K Fitting: - Max. watt: 48W Voltage: 24V Lumen 2700K: 5225 Lumen 3000K: 5462 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request	 IP20	
	BOOMER LINE 2400 UP	FINISH & ORDER CODE 2700K Black T86H26DZL 2700K White T86H26DWL 2700K Brushed alu T86H26DAB 3000K Black T86H33DZL 3000K White T86H33DWL 3000K Brushed alu T86H33DAB	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K/ 3000K Fitting: - Max. watt: 48W Voltage: 24V Lumen 2700K: 5225 Lumen 3000K: 5462 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request	 IP20	


	CEILING BASE ON/OFF 36W-24V	FINISH & ORDER CODE Black TB24N001ZL White TB24N001WL	LIGHT SPECS & ELECTRO Lamp type: - Colour temp: - Fitting: - Max. watt: 36W Voltage: 230V Lumen: - Gear: INCLUDED Beam angle: - CRI: -
	INCL. ON/OFF DRIVER ADDITIONAL INFORMATION RAL colours available		 IP20
	CEILING BASE DIM 0-10V 40W-24V	FINISH & ORDER CODE Black TB24V001ZL White TB24V001WL	LIGHT SPECS & ELECTRO Lamp type: - Colour temp: - Fitting: - Max. watt: 40W Voltage: 230V Lumen: - Gear: INCLUDED Beam angle: - CRI: -
	INCL. 0-10V DRIVER ADDITIONAL INFORMATION RAL colours available		 IP20
	CEILING BASE ON/OFF 60W-24V	FINISH & ORDER CODE Black TB24N002ZL White TB24N002WL	LIGHT SPECS & ELECTRO Lamp type: - Colour temp: - Fitting: - Max. watt: 60W Voltage: 230V Lumen: - Gear: INCLUDED Beam angle: - CRI: -
	INCL. ON/OFF DRIVER ADDITIONAL INFORMATION RAL colours available		 IP20
	CEILING BASE DIM 0-10V 60W-24V	FINISH & ORDER CODE Black TB24V002ZL White TB24V002WL	LIGHT SPECS & ELECTRO Lamp type: - Colour temp: - Fitting: - Max. watt: 60W Voltage: 230V Lumen: - Gear: INCLUDED Beam angle: - CRI: -
	INCL. 0-10V DRIVER ADDITIONAL INFORMATION RAL colours available		 IP20
	CEILING BASE RECTANGLE 275 DIM TRIAC 50W-24V	FINISH & ORDER CODE Black TB24T001ZL White TB24T001WL Brushed alu TB24T001AB	LIGHT SPECS & ELECTRO Lamp type: - Colour temp: - Fitting: - Max. watt: 50W Voltage: 230V Lumen: - Gear: INCLUDED Beam angle: - CRI: -
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available		 IP20

	CEILING BASE RECTANGLE 275 DIM DALI 60W-24V INCL. DALI DRIVER	FINISH & ORDER CODE Black TB24D001ZL White TB24D001WL Brushed alu TB24D001AB	LIGHT SPECS & ELECTRO Lamp type: - Colour temp: - Fitting: - Max. watt: 60W Voltage: 230V Lumen: - Gear: INCLUDED Beam angle: - CRI: -  IP20
	CEILING BASE SB 55 EXCL. DRIVER	FINISH & ORDER CODE Black TBL011ZL White TBL011WL Brushed alu TBL011AB	ADDITIONAL INFORMATION RAL colours available
	CEILING BASE SB 100 EXCL. DRIVER	FINISH & ORDER CODE Black TBL012ZL White TBL012WL Brushed alu TBL012AB	ADDITIONAL INFORMATION RAL colours available
	CEILING PLATE C1B 60 (40-50) EXCL. DRIVER	FINISH & ORDER CODE Black TPL005ZL White TPL005WL	ADDITIONAL INFORMATION For concrete ceiling Hole size: 40-50 mm x h35mm
	CEILING PLATE C1B 90 (50-60) EXCL. DRIVER	FINISH & ORDER CODE Black TPL007ZL White TPL007WL	ADDITIONAL INFORMATION For concrete ceiling Hole size: 50-60 mm x h35mm


 Ø90	CEILING PLATE C1B 90 (75-85)	FINISH & ORDER CODE Black TPL006ZL White TPL006WL
	EXCL. DRIVER	ADDITIONAL INFORMATION For concrete ceiling Hole size: 75-85 mm x h35mm
 Ø60	CEILING PLATE C1S 60 (40-50)	FINISH & ORDER CODE Black TPL009ZL White TPL009WL
	EXCL. DRIVER	ADDITIONAL INFORMATION For plasterboard Hole size: 40-50 mm x h35mm
 Ø90	CEILING PLATE C1S 90 (40-80)	FINISH & ORDER CODE Black TPL010ZL White TPL010WL
	EXCL. DRIVER	ADDITIONAL INFORMATION For plasterboard Hole size: 40-80 mm x h35mm
 Ø10 22	CABLE GUIDE LED	FINISH & ORDER CODE Black TA001ZL White TA001WL Brushed alu TA001AB
	ADDITIONAL INFORMATION RAL colours available	




BOOMER LINE PROFILE



BOOMER LINE 1200



BOOMER LINE 1800



BOOMER LINE 2400

