



BOUNCE LINE





Suspension — Design by Glenn Marys






PRODUCT INFORMATION






tossB






BOUNCE LINE

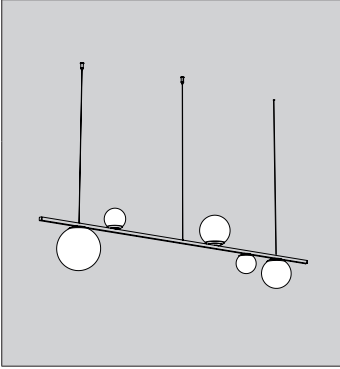
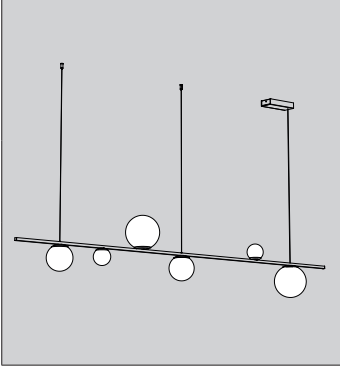
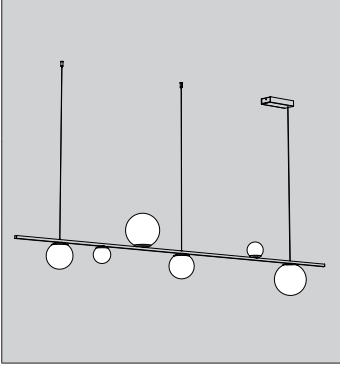
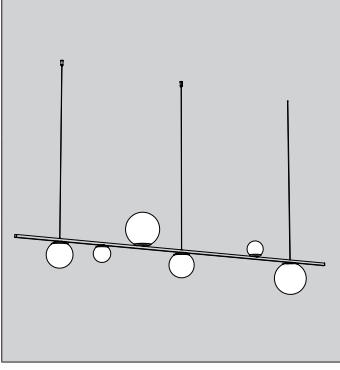
Suspension — Design by Glenn Marys




	BOUNCE LINE 1200 4S DIM TRIAC	FINISH & ORDER CODE Black T111H25DZL White T111H25DWL Bronze T111H25DOE Brushed brass T111H25DLB Light bronze T111H25DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 8W Voltage: 230V Lumen: 752 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 4S DIM DALI	FINISH & ORDER CODE Black T111H25DZLD White T111H25DWLD Bronze T111H25DOED Brushed brass T111H25DLBD Light bronze T111H25DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 8W Voltage: 230V Lumen: 752 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 4S	FINISH & ORDER CODE Black T111H31DZL White T111H31DWL Bronze T111H31DOE Brushed brass T111H31DLB Light bronze T111H31DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 8W Voltage: 23V - 350mA Lumen: 752 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 4M DIM TRIAC	FINISH & ORDER CODE Black T111H26DZL White T111H26DWL Bronze T111H26DOE Brushed brass T111H26DLB Light bronze T111H26DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1424 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20

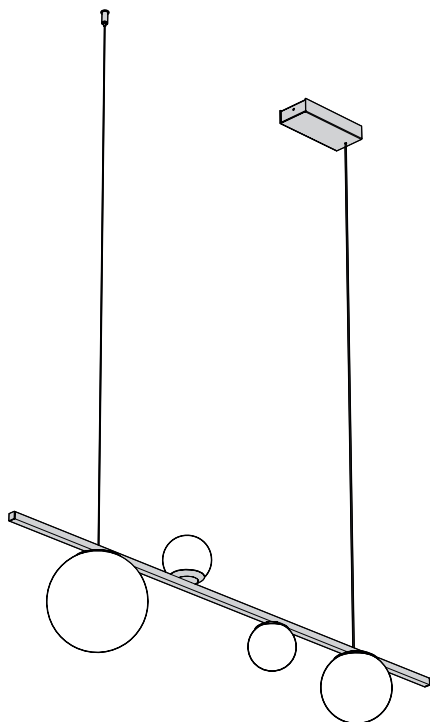
	BOUNCE LINE 1200 4M DIM DALI	FINISH & ORDER CODE Black T111H26DZLD White T111H26DWLD Bronze T111H26DOED Brushed brass T111H26DLBD Light bronze T111H26DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1424 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 4M	FINISH & ORDER CODE Black T111H32DZL White T111H32DWL Bronze T111H32DOE Brushed brass T111H32DLB Light bronze T111H32DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 45V - 350mA Lumen: 1424 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 4L	FINISH & ORDER CODE Black T111H33DZL White T111H33DWL Bronze T111H33DOE Brushed brass T111H33DLB Light bronze T111H33DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 40W Voltage: 112V - 350mA Lumen: 3872 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 SSML DIM TRIAC	FINISH & ORDER CODE Black T111H37DZL White T111H37DWL Bronze T111H37DOE Brushed brass T111H37DLB Light bronze T111H37DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 18W Voltage: 230V Lumen: 1700 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1200 SSML DIM DALI	FINISH & ORDER CODE Black T111H37DZLD White T111H37DWLD Bronze T111H37DOED Brushed brass T111H37DLBD Light bronze T111H37DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 18W Voltage: 230V Lumen: 1700 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20

	BOUNCE LINE 1200 SSML	FINISH & ORDER CODE Black T111H38DZL White T111H38DWL Bronze T111H38DOE Brushed brass T111H38DLB Light bronze T111H38DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 18W Voltage: 51V - 350mA Lumen: 1700 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1800 7S DIM TRIAC	FINISH & ORDER CODE Black T111H28DZL White T111H28DWL Bronze T111H28DOE Brushed brass T111H28DLB Light bronze T111H28DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 14W Voltage: 230V Lumen: 1316 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1800 7S DIM DALI	FINISH & ORDER CODE Black T111H28DZLD White T111H28DWLD Bronze T111H28DOED Brushed brass T111H28DLBD Light bronze T111H28DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 14W Voltage: 230V Lumen: 1316 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1800 7S	FINISH & ORDER CODE Black T111H34DZL White T111H34DWL Bronze T111H34DOE Brushed brass T111H34DLB Light bronze T111H34DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 14W Voltage: 40V - 350mA Lumen: 1316 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 1800 7M DIM TRIAC	FINISH & ORDER CODE Black T111H29DZL White T111H29DWL Bronze T111H29DOE Brushed brass T111H29DLB Light bronze T111H29DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 28W Voltage: 230V Lumen: 2492 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20


	BOUNCE LINE 1800 7M DIM DALI INCL. DALI DRIVER	FINISH & ORDER CODE Black T111H29DZLD White T111H29DWLD Bronze T111H29DOED Brushed brass T111H29DLBD Light bronze T111H29DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 28W Voltage: 230V Lumen: 2492 Gear: INCLUDED Beam angle: 360° CRI: 90  IP20
	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		
	BOUNCE LINE 1800 7M EXCL. BASE AND DRIVER	FINISH & ORDER CODE Black T111H35DZL White T111H35DWL Bronze T111H35DOE Brushed brass T111H35DLB Light bronze T111H35DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 28W Voltage: 78V - 350mA Lumen: 2492 Gear: NOT INCLUDED Beam angle: 360° CRI: 90  IP20
	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		
	BOUNCE LINE 1800 7L EXCL. BASE AND DRIVER	FINISH & ORDER CODE Black T111H36DZL White T111H36DWL Bronze T111H36DOE Brushed brass T111H36DLB Light bronze T111H36DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 70W Voltage: 195V - 350mA Lumen: 2492 Gear: NOT INCLUDED Beam angle: 360° CRI: 90  IP20
	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		
	BOUNCE LINE 1800 SSMML DIM TRIAC INCL. TRIAC DRIVER	FINISH & ORDER CODE Black T111H39DZL White T111H39DWL Bronze T111H39DOE Brushed brass T111H39DLB Light bronze T111H39DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 22W Voltage: 230V Lumen: 2056 Gear: INCLUDED Beam angle: 360° CRI: 90  IP20
	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		
	BOUNCE LINE 1800 SSMML DIM DALI INCL. DALI DRIVER	FINISH & ORDER CODE Black T111H39DZLD White T111H39DWLD Bronze T111H39DOED Brushed brass T111H39DLBD Light bronze T111H39DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 22W Voltage: 230V Lumen: 2056 Gear: INCLUDED Beam angle: 360° CRI: 90  IP20
	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		

	BOUNCE LINE 1800 SSMML	FINISH & ORDER CODE Black T111H40DZL White T111H40DWL Bronze T111H40DOE Brushed brass T111H40DLB Light bronze T111H40DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 22W Voltage: 62V - 350mA Lumen: 2056 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 2400 SSMML DIM TRIAC	FINISH & ORDER CODE Black T111H42DZL White T111H42DWL Bronze T111H42DOE Brushed brass T111H42DLB Light bronze T111H42DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3024 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 2400 SSMML DIM DALI	FINISH & ORDER CODE Black T111H42DZLD White T111H42DWLD Bronze T111H42DOED Brushed brass T111H42DLBD Light bronze T111H42DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 230V Lumen: 3024 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE LINE 2400 SSMML	FINISH & ORDER CODE Black T111H43DZL White T111H43DWL Bronze T111H43DOE Brushed brass T111H43DLB Light bronze T111H43DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 89V - 350mA Lumen: 3024 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20


 Ø55	CEILING BASE SB 55	FINISH & ORDER CODE Black TBL011ZL White TBL011WL Bronze TBL011OE Brushed brass TBL011LB Light bronze TBL011BL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available	
 Ø100	CEILING BASE SB 100	FINISH & ORDER CODE Black TBL012ZL White TBL012WL Bronze TBL012OE Brushed brass TBL012LB Light bronze TBL012BL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available	
 Ø80	CEILING PLATE C1 80	FINISH & ORDER CODE Black TPL003ZL White TPL003WL Bronze TPL003OE Brushed brass TPL003LB Light bronze TPL003BL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available Hole size: 50mm Mounting holes distance: 60mm	
 Ø100	CEILING PLATE C1 100	FINISH & ORDER CODE Black TPL004ZL White TPL004WL Bronze TPL004OE Brushed brass TPL004LB Light bronze TPL004BL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available Hole size: 70mm Mounting holes distance: 82mm	
 Ø10	CABLE GUIDE LED	FINISH & ORDER CODE Black TA001ZL White TA001WL Bronze TA001OE Brushed brass TA001LB Light bronze TA001BL
	ADDITIONAL INFORMATION RAL colours available	




BOUNCE LINE PROFILE




CEILING BASE RECTANGLE 205




BOUNCE 1200




BOUNCE 1800




BOUNCE 2400



BOUNCE LINE SPHERE S



BOUNCE LINE SPHERE M



BOUNCE LINE SPHERE L

