



BOUNCE





Design by Glenn Marys






PRODUCT INFORMATION






tossB






BOUNCE






Suspension — Design by Glenn Marys






	BOUNCE 475 3S DIM TRIAC	FINISH & ORDER CODE Black T111H1DZL White T111H1DWL Bronze T111H1DOE Brushed brass T111H1DLB Light bronze T111H1DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 230V Lumen: 564 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3S DIM DALI	FINISH & ORDER CODE Black T111H1DZLD White T111H1DWLD Bronze T111H1DOED Brushed brass T111H1DLBD Light bronze T111H1DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 230V Lumen: 564 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3S	FINISH & ORDER CODE Black T111H13DZL White T111H13DWL Bronze T111H13DOE Brushed brass T111H13DLB Light bronze T111H13DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 17V - 350mA Lumen: 564 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3M DIM TRIAC	FINISH & ORDER CODE Black T111H2DZL White T111H2DWL Bronze T111H2DOE Brushed brass T111H2DLB Light bronze T111H2DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 12W Voltage: 230V Lumen: 1068 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20






	BOUNCE 475 3M DIM DALI	FINISH & ORDER CODE Black T111H2DZLD White T111H2DWLD Bronze T111H2DOED Brushed brass T111H2DLBD Light bronze T111H2DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 12W Voltage: 230V Lumen: 1068 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3M	FINISH & ORDER CODE Black T111H14DZL White T111H14DWL Bronze T111H14DOE Brushed brass T111H14DLB Light bronze T111H14DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 12W Voltage: 34V - 350mA Lumen: 1068 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3L DIM TRIAC	FINISH & ORDER CODE Black T111H3DZL White T111H3DWL Bronze T111H3DOE Brushed brass T111H3DLB Light bronze T111H3DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 30W Voltage: 230V Lumen: 2904 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3L DIM DALI	FINISH & ORDER CODE Black T111H3DZLD White T111H3DWLD Bronze T111H3DOED Brushed brass T111H3DLBD Light bronze T111H3DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 30W Voltage: 230V Lumen: 2904 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 475 3L	FINISH & ORDER CODE Black T111H15DZL White T111H15DWL Bronze T111H15DOE Brushed brass T111H15DLB Light bronze T111H15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 30W Voltage: 84V - 350mA Lumen: 2904 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20






	BOUNCE 475 SML DIM TRIAC	FINISH & ORDER CODE Black T111H4DZL White T111H4DWL Bronze T111H4DOE Brushed brass T111H4DLB Light bronze T111H4DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1512 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	
	BOUNCE 475 SML DIM DALI	FINISH & ORDER CODE Black T111H4DZLD White T111H4DWLD Bronze T111H4DOED Brushed brass T111H4DLBD Light bronze T111H4DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1512 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	
	BOUNCE 475 SML	FINISH & ORDER CODE Black T111H16DZL White T111H16DWL Bronze T111H16DOE Brushed brass T111H16DLB Light bronze T111H16DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 45V - 350mA Lumen: 1512 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	
	BOUNCE 675 3S DIM TRIAC	FINISH & ORDER CODE Black T111H5DZL White T111H5DWL Bronze T111H5DOE Brushed brass T111H5DLB Light bronze T111H5DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 230V Lumen: 564 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	
	BOUNCE 675 3S DIM DALI	FINISH & ORDER CODE Black T111H5DZLD White T111H5DWLD Bronze T111H5DOED Brushed brass T111H5DLBD Light bronze T111H5DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 230V Lumen: 564 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	






	BOUNCE 675 3S	FINISH & ORDER CODE Black T111H17DZL White T111H17DWL Bronze T111H17DOE Brushed brass T111H17DLB Light bronze T111H17DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 6W Voltage: 17V - 350mA Lumen: 564 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 675 3M DIM TRIAC	FINISH & ORDER CODE Black T111H6DZL White T111H6DWL Bronze T111H6DOE Brushed brass T111H6DLB Light bronze T111H6DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 12W Voltage: 230V Lumen: 1068 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 675 3M DIM DALI	FINISH & ORDER CODE Black T111H6DZLD White T111H6DWLD Bronze T111H6DOED Brushed brass T111H6DLBD Light bronze T111H6DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 12W Voltage: 230V Lumen: 1068 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 675 3M	FINISH & ORDER CODE Black T111H18DZL White T111H18DWL Bronze T111H18DOE Brushed brass T111H18DLB Light bronze T111H18DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 12W Voltage: 34V - 350mA Lumen: 1068 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 675 3L DIM TRIAC	FINISH & ORDER CODE Black T111H7DZL White T111H7DWL Bronze T111H7DOE Brushed brass T111H7DLB Light bronze T111H7DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 30W Voltage: 230V Lumen: 2904 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20




	BOUNCE 675 3L DIM DALI	FINISH & ORDER CODE Black T111H7DZLD White T111H7DWLD Bronze T111H7DOED Brushed brass T111H7DLBD Light bronze T111H7DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 30W Voltage: 230V Lumen: 2904 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 675 3L	FINISH & ORDER CODE Black T111H19DZL White T111H19DWL Bronze T111H19DOE Brushed brass T111H19DLB Light bronze T111H19DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 30W Voltage: 84V - 350mA Lumen: 2904 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 675 SML DIM TRIAC	FINISH & ORDER CODE Black T111H8DZL White T111H8DWL Bronze T111H8DOE Brushed brass T111H8DLB Light bronze T111H8DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1512 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 675 SML DIM DALI	FINISH & ORDER CODE Black T111H8DZLD White T111H8DWLD Bronze T111H8DOED Brushed brass T111H8DLBD Light bronze T111H8DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1512 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 675 SML	FINISH & ORDER CODE Black T111H20DZL White T111H20DWL Bronze T111H20DOE Brushed brass T111H20DLB Light bronze T111H20DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 45V - - 350mA Lumen: 1512 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20

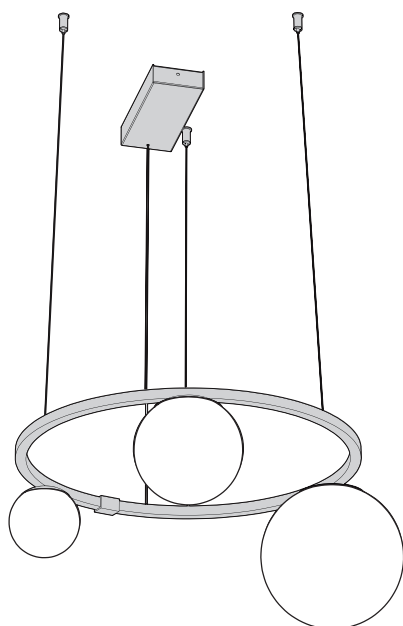
	BOUNCE 875 4S DIM TRIAC	FINISH & ORDER CODE Black T111H9DZL White T111H9DWL Bronze T111H9DOE Brushed brass T111H9DLB Light bronze T111H9DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 8W Voltage: 230V Lumen: 752 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 875 4S DIM DALI	FINISH & ORDER CODE Black T111H9DZLD White T111H9DWLD Bronze T111H9DOED Brushed brass T111H9DLBD Light bronze T111H9DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 8W Voltage: 230V Lumen: 752 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 875 4S	FINISH & ORDER CODE Black T111H21DZL White T111H21DWL Bronze T111H21DOE Brushed brass T111H21DLB Light bronze T111H21DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 8W Voltage: 23V- 350mA Lumen: 752 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 875 4M DIM TRIAC	FINISH & ORDER CODE Black T111H10DZL White T111H10DWL Bronze T111H10DOE Brushed brass T111H10DLB Light bronze T111H10DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1424 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 875 4M DIM DALI	FINISH & ORDER CODE Black T111H10DZLD White T111H10DWLD Bronze T111H10DOED Brushed brass T111H10DLBD Light bronze T111H10DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 230V Lumen: 1424 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20







	BOUNCE 875 4M	FINISH & ORDER CODE Black T111H22DZL White T111H22DWL Bronze T111H22DOE Brushed brass T111H22DLB Light bronze T111H22DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 45V - 350mA Lumen: 1424 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 875 SMML DIM TRIAC	FINISH & ORDER CODE Black T111H11DZL White T111H11DWL Bronze T111H11DOE Brushed brass T111H11DLB Light bronze T111H11DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 20W Voltage: 230V Lumen: 1868 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 875 SMML DIM DALI	FINISH & ORDER CODE Black T111H11DZLD White T111H11DWLD Bronze T111H11DOED Brushed brass T111H11DLBD Light bronze T111H11DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 20W Voltage: 230V Lumen: 1868 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 875 SMML	FINISH & ORDER CODE Black T111H23DZL White T111H23DWL Bronze T111H23DOE Brushed brass T111H23DLB Light bronze T111H23DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 20W Voltage: 56V - 350mA Lumen: 1868 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20
	BOUNCE 875 SSLL DIM TRIAC	FINISH & ORDER CODE Black T111H12DZL White T111H12DWL Bronze T111H12DOE Brushed brass T111H12DLB Light bronze T111H12DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2312 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request	 IP20

	BOUNCE 875 SSLL DIM DALI	FINISH & ORDER CODE Black T111H12DZLD White T111H12DWLD Bronze T111H12DOED Brushed brass T111H12DLBD Light bronze T111H12DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2312 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 875 SSLL	FINISH & ORDER CODE Black T111H24DZL White T111H24DWL Bronze T111H24DOE Brushed brass T111H24DLB Light bronze T111H24DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 67V - 350mA Lumen: 2312 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 1400 SSMMMLL DIM TRIAC	FINISH & ORDER CODE Black T111H44DZL White T111H44DWL Brushed brass T111H44DLB Light bronze T111H44DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 36W Voltage: 230V Lumen: 3380 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 1400 SSMMMLL DIM DALI	FINISH & ORDER CODE Black T111H44DZLD White T111H44DWLD Brushed brass T111H44DLBD Light bronze T111H44DBLD	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 36W Voltage: 230V Lumen: 3380 Gear: INCLUDED Beam angle: 360° CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20
	BOUNCE 1400 SSMMMLL	FINISH & ORDER CODE Black T111H45DZL White T111H45DWL Brushed brass T111H45DLB Light bronze T111H45DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 36W Voltage: 101V - 350mA Lumen: 3380 Gear: NOT INCLUDED Beam angle: 360° CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available Standard cable length 2500mm - longer cable available on request Brushed alu available on request		 IP20

	CEILING BASE SB 55	FINISH & ORDER CODE Black TBL011ZL White TBL011WL Bronze TBL011OE Brushed brass TBL011LB Light bronze TBL011BL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available	
	CEILING BASE SB 100	FINISH & ORDER CODE Black TBL012ZL White TBL012WL Bronze TBL012OE Brushed brass TBL012LB Light bronze TBL012BL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available	
	CLUSTERBOX 300 LED	FINISH & ORDER CODE Black TCL001ZL White TCL001WL
	EXCL. DRIVER ADDITIONAL INFORMATION RAL colours available multiple pendants possible	
	CEILING PLATE C1B 60 (40-50)	FINISH & ORDER CODE Black TPL005ZL White TPL005WL Bronze TPL005OE Brushed brass TPL005LB Light bronze TPL005BL
	EXCL. DRIVER ADDITIONAL INFORMATION For concrete ceiling Hole size: 40-50 mm x h35mm	
	CEILING PLATE C1B 90 (50-60)	FINISH & ORDER CODE Black TPL007ZL White TPL007WL Bronze TPL007OE Brushed brass TPL007LB Light bronze TPL007BL
	EXCL. DRIVER ADDITIONAL INFORMATION For concrete ceiling Hole size: 50-60 mm x h35mm	

 Ø90	CEILING PLATE C1B 90 (75-85)	FINISH & ORDER CODE Black TPL006ZL White TPL006WL Bronze TPL006OE Brushed brass TPL006LB Light bronze TPL006BL
	EXCL. DRIVER	ADDITIONAL INFORMATION For concrete ceiling Hole size: 75-85 mm x h35mm
 Ø60	CEILING PLATE C1S 60 (40-50)	FINISH & ORDER CODE Black TPL009ZL White TPL009WL Bronze TPL009OE Brushed brass TPL009LB Light bronze TPL009BL
	EXCL. DRIVER	ADDITIONAL INFORMATION For plasterboard Hole size: 40-50 mm x h35mm
 Ø90	CEILING PLATE C1S 90 (40-80)	FINISH & ORDER CODE Black TPL010ZL White TPL010WL Bronze TPL010OE Brushed brass TPL010LB Light bronze TPL010BL
	EXCL. DRIVER	ADDITIONAL INFORMATION For plasterboard Hole size: 40-80 mm x h35mm
 Ø10 22	CABLE GUIDE LED	FINISH & ORDER CODE Black TA001ZL White TA001WL Bronze TA001OE Brushed brass TA001LB Light bronze TA001BL
	ADDITIONAL INFORMATION RAL colours available	



BOUNCE PROFILE 	CEILING BASE RECTANGLE 205 		
BOUNCE RING 475  Ø490	BOUNCE RING 675  Ø690	BOUNCE RING 875  Ø890	BOUNCE RING 1400  Ø1415
BOUNCE SPHERE S  Ø100	BOUNCE SPHERE M  Ø150	BOUNCE SPHERE L  Ø200	