

# TWINS


CEILING — Design by Glenn Marys

**PRODUCT INFORMATION**

tossB

# TWINS

Ceiling — Design by Glenn Marys



## TWINS 475 CEILING PLATE H15

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C10P15DZL |
| White | T110C10P15DWL |
| Brushed alu | T110C10P15DAB |
| Bronze | T110C10P15DOE |
| Brushed brass | T110C10P15DLB |
| Light bronze | T110C10P15DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
For plasterboard ceiling- Hole size: 55-75 mm x h35mm
Remote driver required



## TWINS 475 CEILING PLATE H30

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C10P30DZL |
| White | T110C10P30DWL |
| Brushed alu | T110C10P30DAB |
| Bronze | T110C10P30DOE |
| Brushed brass | T110C10P30DLB |
| Light bronze | T110C10P30DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
For plasterboard ceiling- Hole size: 55-75 mm x h35mm
Remote driver required



## TWINS 475 CEILING BASE H15

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C10B15DZL |
| White | T110C10B15DWL |
| Brushed alu | T110C10B15DAB |
| Bronze | T110C10B15DOE |
| Brushed brass | T110C10B15DLB |
| Light bronze | T110C10B15DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
Hole size: 60 mm x h35mm
Remote driver required



## TWINS 475 CEILING BASE H30

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C10B30DZL |
| White | T110C10B30DWL |
| Brushed alu | T110C10B30DAB |
| Bronze | T110C10B30DOE |
| Brushed brass | T110C10B30DLB |
| Light bronze | T110C10B30DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
Hole size: 60 mm x h35mm
Remote driver required

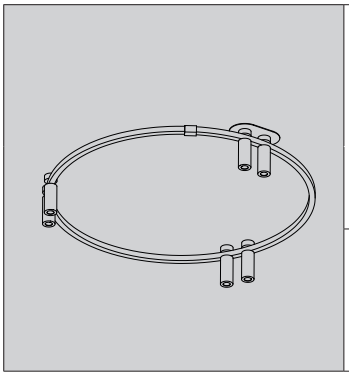

## TWINS 675 CEILING PLATE H15

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C13P15DZL |
| White | T110C13P15DWL |
| Brushed alu | T110C13P15DAB |
| Bronze | T110C13P15DOE |
| Brushed brass | T110C13P15DLB |
| Light bronze | T110C13P15DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
For plasterboard ceiling- Hole size: 55-75 mm x h35mm
Remote driver required

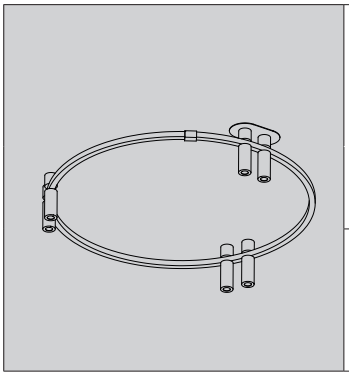

## TWINS 675 CEILING PLATE H30

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C13P30DZL |
| White | T110C13P30DWL |
| Brushed alu | T110C13P30DAB |
| Bronze | T110C13P30DOE |
| Brushed brass | T110C13P30DLB |
| Light bronze | T110C13P30DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
For plasterboard ceiling- Hole size: 55-75 mm x h35mm
Remote driver required

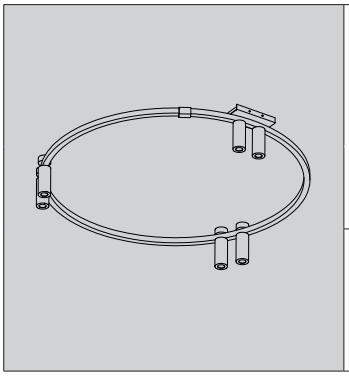

## TWINS 675 CEILING BASE H15

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C13B15DZL |
| White | T110C13B15DWL |
| Brushed alu | T110C13B15DAB |
| Bronze | T110C13B15DOE |
| Brushed brass | T110C13B15DLB |
| Light bronze | T110C13B15DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
Hole size: 60 mm x h35mm
Remote driver required

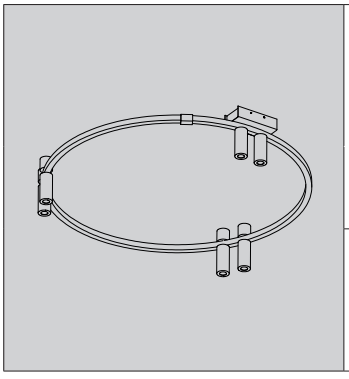

## TWINS 675 CEILING BASE H30

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C13B30DZL |
| White | T110C13B30DWL |
| Brushed alu | T110C13B30DAB |
| Bronze | T110C13B30DOE |
| Brushed brass | T110C13B30DLB |
| Light bronze | T110C13B30DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
Hole size: 60 mm x h35mm
Remote driver required

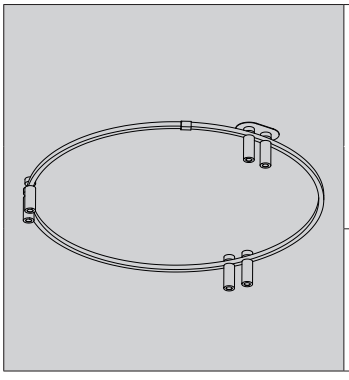

## TWINS 875 CEILING PLATE H15

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C16P15DZL |
| White | T110C16P15DWL |
| Alu brushed | T110C16P15DAB |
| Bronze | T110C16P15DOE |
| Brushed brass | T110C16P15DLB |
| Light bronze | T110C16P15DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
For plasterboard ceiling- Hole size: 55-75 mm x h35mm
Remote driver required



## TWINS 875 CEILING PLATE H30

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C16P30DZL |
| White | T110C16P30DWL |
| Alu brushed | T110C16P30DAB |
| Bronze | T110C16P30DOE |
| Brushed brass | T110C16P30DLB |
| Light bronze | T110C16P30DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
For plasterboard ceiling- Hole size: 55-75 mm x h35mm
Remote driver required



## TWINS 875 CEILING BASE H15

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C16B15DZL |
| White | T110C16B15DWL |
| Alu Brushed | T110C16B15DAB |
| Bronze | T110C16B15DOE |
| Brushed brass | T110C16B15DLB |
| Light bronze | T110C16B15DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |

IP20

**ADDITIONAL INFORMATION**

3000K available - Beam angle 10° and 25° available
Hole size: 60 mm x h35mm
Remote driver required



## TWINS 875 CEILING BASE H30

**EXCL. DRIVER**

**FINISH & ORDER CODE**

| | |
|---|---|
| Black | T110C16B30DZL |
| White | T110C16B30DWL |
| Alu brushed | T110C16B30DAB |
| Bronze | T110C16B30DOE |
| Brushed brass | T110C16B30DLB |
| Light bronze | T110C16B30DBL |


**LIGHT SPECS & ELECTRO**

| | |
|---|---|
| Lamp type: | LED |
| Colour temp: | 2700K |
| Fitting: | - |
| Max. watt: | 24W |
| Voltage: | 68V - 350mA |
| Lumen: | 2400 |
| Gear: | NOT INCLUDED |
| Beam angle: | 45° |
| CRI: | 90 |


IP20

**ADDITIONAL INFORMATION**


3000K available - Beam angle 10° and 25° available
Hole size: 60 mm x h35mm
Remote driver required

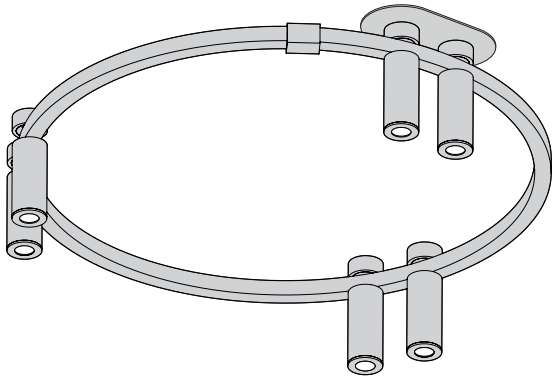


**TWINS LINE PROFILE**





**TWINS TUBE 75**





**RING SIZE 475**





**RING SIZE 675**





**RING SIZE 875**





**CEILING PLATE H15**




**CEILING PLATE H30**




**CEILING BASE H15**




**CEILING BASE H30**

