



TWINS





Suspension — Design by Glenn Marys






PRODUCT INFORMATION






tossB






TWINS






Suspension — Design by Glenn Marys




	TWINS 475 TUBE 75 DIM TRIAC	FINISH & ORDER CODE Black T110H1DZLT White T110H1DWLT Brushed alu T110H1DABT Bronze T110H1DOET Brushed brass T110H1DLBT Light bronze T110H1DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 75 DIM DALI	FINISH & ORDER CODE Black T110H1DZL White T110H1DWL Brushed alu T110H1DAB Bronze T110H1DOE Brushed brass T110H1DLB Light bronze T110H1DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 75	FINISH & ORDER CODE Black T110H1DZL White T110H1DWL Brushed alu T110H1DAB Bronze T110H1DOE Brushed brass T110H1DLB Light bronze T110H1DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 125 DIM TRIAC	FINISH & ORDER CODE Black T110H4DZLT White T110H4DWLT Brushed alu T110H4DABT Bronze T110H4DOET Brushed brass T110H4DLBT Light bronze T110H4DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20





	TWINS 475 TUBE 125 DIM DALI	FINISH & ORDER CODE Black T110H4DZL White T110H4DWL Brushed alu T110H4DAB Bronze T110H4DOE Brushed brass T110H4DLB Light bronze T110H4DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 125	FINISH & ORDER CODE Black T110H11DZL White T110H11DWL Brushed alu T110H11DAB Bronze T110H11DOE Brushed brass T110H11DLB Light bronze T110H11DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 185 DIM TRIAC	FINISH & ORDER CODE Black T110H7DZLT White T110H7DWLT Brushed alu T110H7DABT Bronze T110H7DOET Brushed brass T110H7DLBT Light bronze T110H7DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 185 DIM DALI	FINISH & ORDER CODE Black T110H7DZL White T110H7DWL Brushed alu T110H7DAB Bronze T110H7DOE Brushed brass T110H7DLB Light bronze T110H7DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 475 TUBE 185	FINISH & ORDER CODE Black T110H12DZL White T110H12DWL Brushed alu T110H12DAB Bronze T110H12DOE Brushed brass T110H12DLB Light bronze T110H12DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20


	TWINS 675 TUBE 75 DIM TRIAC	FINISH & ORDER CODE Black T110H2DZLT White T110H2DWLT Brushed alu T110H2DABT Bronze T110H2DOET Brushed brass T110H2DLBT Light bronze T110H2DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2200 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS 675 TUBE 75 DIM DALI	FINISH & ORDER CODE Black T110H2DZL White T110H2DWL Brushed alu T110H2DAB Bronze T110H2DOE Brushed brass T110H2DLB Light bronze T110H2DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS 675 TUBE 75	FINISH & ORDER CODE Black T110H13DZL White T110H13DWL Brushed alu T110H13DAB Bronze T110H13DOE Brushed brass T110H13DLB Light bronze T110H13DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS 675 TUBE 125 DIM TRIAC	FINISH & ORDER CODE Black T110H5DZLT White T110H5DWLT Brushed alu T110H5DABT Bronze T110H5DOET Brushed brass T110H5DLBT Light bronze T110H5DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20
	TWINS 675 TUBE 125 DIM DALI	FINISH & ORDER CODE Black T110H5DZL White T110H5DWL Brushed alu T110H5DAB Bronze T110H5DOE Brushed brass T110H5DLB Light bronze T110H5DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request		 IP20

	TWINS 675 TUBE 125	FINISH & ORDER CODE Black T110H14DZL White T110H14DWL Brushed alu T110H14DAB Bronze T110H14DOE Brushed brass T110H14DLB Light bronze T110H14DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 675 TUBE 185 DIM TRIAC	FINISH & ORDER CODE Black T110H8DZLT White T110H8DWLT Brushed alu T110H8DABT Bronze T110H8DOET Brushed brass T110H8DLBT Light bronze T110H8DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 675 TUBE 185 DIM DALI	FINISH & ORDER CODE Black T110H8DZL White T110H8DWL Brushed alu T110H8DAB Bronze T110H8DOE Brushed brass T110H8DLB Light bronze T110H8DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 675 TUBE 185	FINISH & ORDER CODE Black T110H15DZL White T110H15DWL Brushed alu T110H15DAB Bronze T110H15DOE Brushed brass T110H15DLB Light bronze T110H15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 875 TUBE 75 DIM TRIAC	FINISH & ORDER CODE Black T110H3DZLT White T110H3DWLT Brushed alu T110H3DABT Bronze T110H3DOET Brushed brass T110H3DLBT Light bronze T110H3DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20


	TWINS 875 TUBE 75 DIM DALI	FINISH & ORDER CODE Black T110H3DZL White T110H3DWL Brushed alu T110H3DAB Bronze T110H3DOE Brushed brass T110H3DLB Light bronze T110H3DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 875 TUBE 75	FINISH & ORDER CODE Black T110H16DZL White T110H16DWL Brushed alu T110H16DAB Bronze T110H16DOE Brushed brass T110H16DLB Light bronze T110H16DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 875 TUBE 125 DIM TRIAC	FINISH & ORDER CODE Black T110H6DZLT White T110H6DWLT Brushed alu T110H6DABT Bronze T110H6DOET Brushed brass T110H6DLBT Light bronze T110H6DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 875 TUBE 125 DIM DALI	FINISH & ORDER CODE Black T110H6DZL White T110H6DWL Brushed alu T110H6DAB Bronze T110H6DOE Brushed brass T110H6DLB Light bronze T110H6DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20
	TWINS 875 TUBE 125	FINISH & ORDER CODE Black T110H17DZL White T110H17DWL Brushed alu T110H17DAB Bronze T110H17DOE Brushed brass T110H17DLB Light bronze T110H17DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	 IP20


	TWINS 875 TUBE 185 DIM TRIAC	FINISH & ORDER CODE Black T110H9DZLT White T110H9DWLT Brushed alu T110H9DABT Bronze T110H9DOET Brushed brass T110H9DLBT Light bronze T110H9DBLT	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. TRIAC DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	
	TWINS 875 TUBE 185 DIM DALI	FINISH & ORDER CODE Black T110H9DZL White T110H9DWL Brushed alu T110H9DAB Bronze T110H9DOE Brushed brass T110H9DLB Light bronze T110H9DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 230V Lumen: 2400 Gear: INCLUDED Beam angle: - CRI: 90
	INCL. DALI DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	
	TWINS 875 TUBE 185	FINISH & ORDER CODE Black T110H18DZL White T110H18DWL Brushed alu T110H18DAB Bronze T110H18DOE Brushed brass T110H18DLB Light bronze T110H18DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: - CRI: 90
	EXCL. BASE AND DRIVER	ADDITIONAL INFORMATION RAL colours available 3000K available - Beam angle 10° and 25° available Standard cable length 2500mm - longer cable available on request	

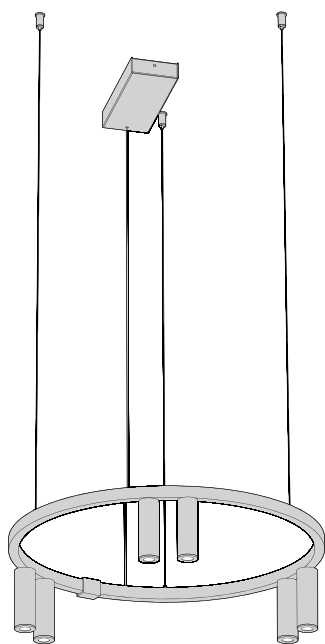
 Ø55	CEILING BASE SB 55	FINISH & ORDER CODE Black TBL011ZL White TBL011WL Brushed alu TBL011AB Bronze TBL011OE Brushed brass TBL011LB Light bronze TBL011BL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available
 Ø100	CEILING BASE SB 100	FINISH & ORDER CODE Black TBL012ZL White TBL012WL Brushed alu TBL012AB Bronze TBL012OE Brushed brass TBL012LB Light bronze TBL012BL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available
 Ø300	CLUSTERBOX 300 LED	FINISH & ORDER CODE Black TCL001ZL White TCL001WL
	EXCL. DRIVER	ADDITIONAL INFORMATION RAL colours available multiple pendants possible
 Ø60	CEILING PLATE C1B 60 (40-50)	FINISH & ORDER CODE Black TPL005ZL White TPL005WL Bronze TPL005OE Brushed brass TPL005LB Light bronze TPL005BL
	EXCL. DRIVER	ADDITIONAL INFORMATION For concrete ceiling Hole size: 40-50 mm x h35mm
 Ø90	CEILING PLATE C1B 90 (50-60)	FINISH & ORDER CODE Black TPL007ZL White TPL007WL Bronze TPL007OE Brushed brass TPL007LB Light bronze TPL007BL
	EXCL. DRIVER	ADDITIONAL INFORMATION For concrete ceiling Hole size: 70-60 mm x h37mm

 Ø90	CEILING PLATE C1B 90 (75-85)	FINISH & ORDER CODE <table><tr><td>Black</td><td>TPL006ZL</td></tr><tr><td>White</td><td>TPL006WL</td></tr><tr><td>Bronze</td><td>TPL006OE</td></tr><tr><td>Brushed brass</td><td>TPL006LB</td></tr><tr><td>Light bronze</td><td>TPL006BL</td></tr></table>	Black	TPL006ZL	White	TPL006WL	Bronze	TPL006OE	Brushed brass	TPL006LB	Light bronze	TPL006BL
	Black	TPL006ZL										
White	TPL006WL											
Bronze	TPL006OE											
Brushed brass	TPL006LB											
Light bronze	TPL006BL											
EXCL. DRIVER	ADDITIONAL INFORMATION For concrete ceiling Hole size: 75-85 mm x h35mm											


 Ø60	CEILING PLATE C1S 60 (40-50)	FINISH & ORDER CODE <table><tr><td>Black</td><td>TPL009ZL</td></tr><tr><td>White</td><td>TPL009WL</td></tr><tr><td>Bronze</td><td>TPL009OE</td></tr><tr><td>Brushed brass</td><td>TPL009LB</td></tr><tr><td>Light bronze</td><td>TPL009BL</td></tr></table>	Black	TPL009ZL	White	TPL009WL	Bronze	TPL009OE	Brushed brass	TPL009LB	Light bronze	TPL009BL
	Black	TPL009ZL										
White	TPL009WL											
Bronze	TPL009OE											
Brushed brass	TPL009LB											
Light bronze	TPL009BL											
EXCL. DRIVER	ADDITIONAL INFORMATION For plasterboard Hole size: 40-50 mm x h35mm											

 Ø90	CEILING PLATE C1S 90 (40-80)	FINISH & ORDER CODE <table><tr><td>Black</td><td>TPL010ZL</td></tr><tr><td>White</td><td>TPL010WL</td></tr><tr><td>Bronze</td><td>TPL010OE</td></tr><tr><td>Brushed brass</td><td>TPL010LB</td></tr><tr><td>Light bronze</td><td>TPL010BL</td></tr></table>	Black	TPL010ZL	White	TPL010WL	Bronze	TPL010OE	Brushed brass	TPL010LB	Light bronze	TPL010BL
	Black	TPL010ZL										
White	TPL010WL											
Bronze	TPL010OE											
Brushed brass	TPL010LB											
Light bronze	TPL010BL											
EXCL. DRIVER	ADDITIONAL INFORMATION For plasterboard Hole size: 40-80 mm x h35mm											


 22 Ø10	CABLE GUIDE LED	FINISH & ORDER CODE <table><tr><td>Black</td><td>TA001ZL</td></tr><tr><td>White</td><td>TA001WL</td></tr><tr><td>Bronze</td><td>TA001OE</td></tr><tr><td>Brushed brass</td><td>TA001LB</td></tr><tr><td>Light bronze</td><td>TA001BL</td></tr></table>	Black	TA001ZL	White	TA001WL	Bronze	TA001OE	Brushed brass	TA001LB	Light bronze	TA001BL
	Black	TA001ZL										
White	TA001WL											
Bronze	TA001OE											
Brushed brass	TA001LB											
Light bronze	TA001BL											
ADDITIONAL INFORMATION RAL colours available												




CEILING BASE RECTANGLE 205




TWINS PROFILE




TWINS 475




TWINS 675




TWINS 875



TWINS TUBE 75



TWINS TUBE 125



TWINS TUBE 185

